


ROWLOCKS

Our rowlocks are 2" even top. We use even top because they hold the oar more securely & 2" (52mm) because Drascombe oars are usually about 46mm diameter, 52mm over the leathers or buttons. The oar will drop through the rowlock jaws & when the oar is moved out so that the leather/button is within the rowlock, it will not jump out as you row. Rowlocks that allow the oar to jump out can be extremely annoying.

The stem is 12.5mm (½") to fit the Drascombe rowlock socket or sculling socket.

We supply them in bronze or galvanised. The galvanised ones are a bit more crude & will sometimes require the socket to be reamed out to make them fit.

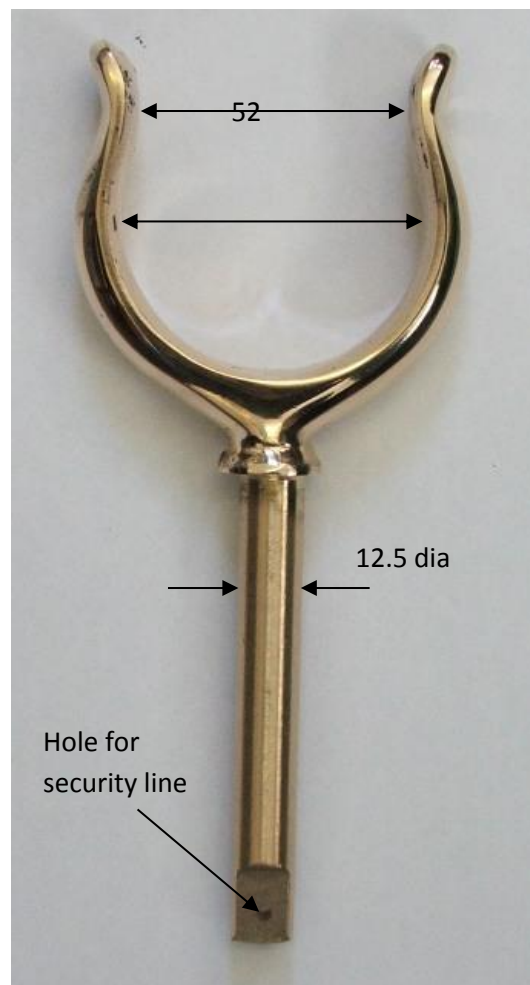

If you wish to secure your rowlocks, fit them with a light line with a slipknot & loop that will pass through the socket. Pass the loop over the rowlock & tighten.

Provided the line is long enough the unshipped rowlock will lie comfortably in the scupper rather than crash around against the gunwhale.



For reference, this is a 2" uneven top rowlock (although none of the measurements are actually 2", they are all larger so the oar is a very sloppy fit):

